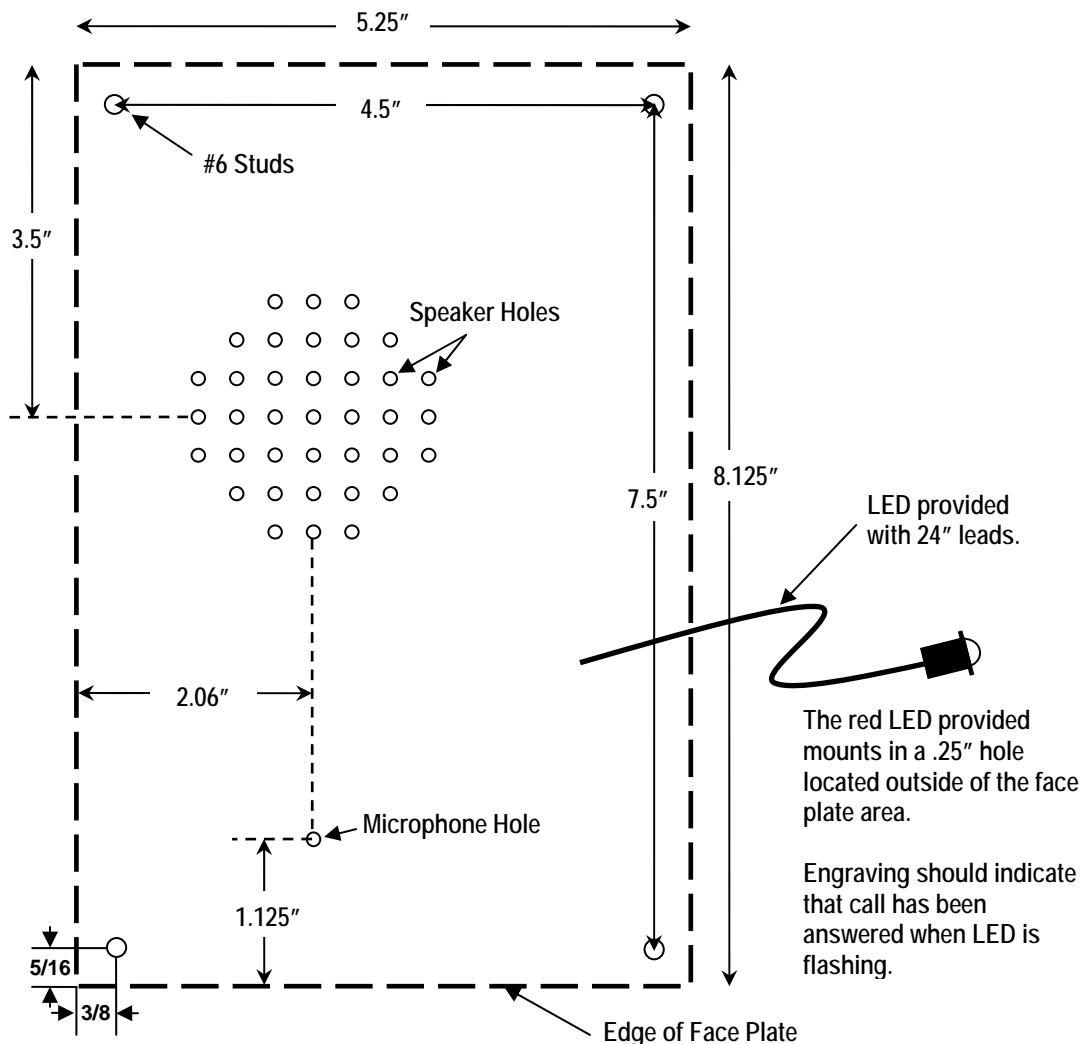


WEBBPHONE OEM-150 HANDSFREE MOUNTING SPECIFICATIONS
Front View (As seen by passenger in cab)
Rev. 1.2 – Jun/04


- Depth of handsfree unit is less than 2.0".
- 4 mounting posts to be #6 welded studs 1.0" in length. See mounting holes on faceplate for location.
- Speaker holes to be approximately 1/8" diameter with an overall circular pattern of approximately 2.0".
- Microphone hole to be approximately 1/16" diameter.
- Allow minimum .25" clearance on all sides of face plate to facilitate mounting and wiring.
- To meet ADA requirements, raised letters and Braille must be provided.